

# ARRAY TULIP - 4425-TUL

PROJECT PROJÉT
SPEC TYPE
NOTES




## DIFFUSER DIFFUSEURS




## FINISH FINI



## POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

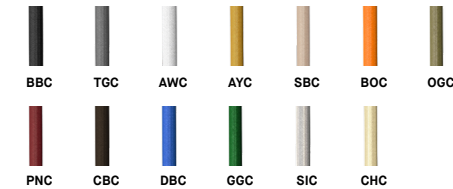

## CONFIGURATION OPTIONS OPTION DE CONFIGURATIONS

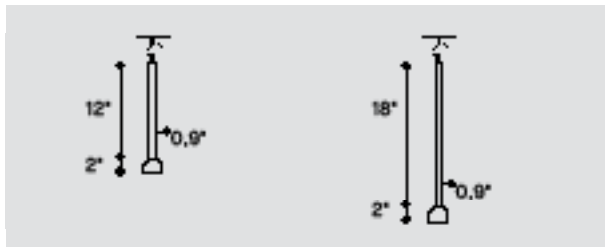

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE	CODE
4425-TUL ARRAY TULIP	
CONFIGURATION CONFIGURATION	
312L LEVELED CLUSTER (3 PENDANTS 12")	
318L LEVELED CLUSTER (3 PENDANTS 18")	
31XL LEVELED CLUSTER (VARIED LENGTHS, 1 PENDANT 12" + 2 PENDANTS 18")	
312I INCLINED CLUSTER (3 PENDANTS 12")	
318I INCLINED CLUSTER (3 PENDANTS 18")	
312V V-SHAPED CLUSTER (3 PENDANTS 12")	
318V V-SHAPED CLUSTER (3 PENDANTS 18")	
512L LEVELED CLUSTER (5 PENDANTS 12")	
518L LEVELED CLUSTER (5 PENDANTS 18")	
51XL LEVELED CLUSTER (VARIED LENGTHS, 2 PENDANTS 12" + 3 PENDANTS 18")	
512I INCLINED CLUSTER (5 PENDANTS 12")	
518I INCLINED CLUSTER (5 PENDANTS 18")	
512V V-SHAPED CLUSTER (5 PENDANTS 12")	
518V V-SHAPED CLUSTER (5 PENDANTS 18")	
DIFFUSER DIFFUSEUR	
BLB BULB - RECESSED FLAT LENS (BEAM ANGLE 20°)	
BUD BUD - 1" SMALL DIFFUSER, FROSTED	
BSM BLOSSOM - 2" LARGE DIFFUSER, FROSTED	
LIGHT SOURCE SOURCE LUMINEUSE	LED
LED REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	
WDIM 2200K-3000K	
27 2700K (STATIC WHITE)	
30 3000K (STATIC WHITE)	
35 3500K (STATIC WHITE)	
40* 4000K (STATIC WHITE)	
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)	90
90 90+ CRI	
VOLTAGE VOLTAGE	
120V 120 VOLT	
277V 277 VOLT	
CONTROL OPTION OPTION DE CONTRÔLE	
DV 0-10V DIMMING (120V-277V)	
DP PHASE DIMMING (120V ONLY)	
NLTAIR2* NLIGHT AIR CONTROL GEN 2	
NLIGHT* NLIGHT WIRED CONTROL	
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLA A FOR NLTAIR2 OR 39NLWA FOR NLIGHT) REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
CABLE LENGTH LONGUEUR DE CÂBLE	
** OVERALL HEIGHT (PLEASE SPECIFY)	
** OVERALL HEIGHT (H) IS MEASURED FROM BOTTOM OF THE FIXTURE TO CEILING, IN INCHES CONFIGURATION PATTERN IS SET, ONLY UPPER CABLES ARE INFLUENCED BY OVERALL HEIGHT	
CANOPY FINISH FINI PAVILLON	
BLKE BLACK	
WHE WHITE	
MATCH* COLOR MATCH WITH TUBE FINISH	
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION	
BBC BASIC BLACK	PNC PINOT NOIR
BOC BLOOD ORANGE	SIC SILVER
DBC DYNAMIC BLUE	AYC APRICOT YELLOW
TGC TITANIUM GRAY	CBC CHOCOLATE BROWN
OGC OLIVE GREEN	CHC CHAMPAGNE
GGC GRASS GREEN	SBC SAND BEIGE
AWC ARCTIC WHITE	
TUBE FINISH FINI TUBE	
BLKE BLACK	HGE* HUNTER GREEN
WHE WHITE	CBE* CHOCOLATE BROWN
DBE* DYNAMIC BLUE	STE* SUMMER TEAL
GGE* GRASS GREEN	SGE* SAGE GREY
BRE* BRICK RED	LNE* LUNAR GREY
AYE* APRICOT YELLOW	SIM* SILVER (GLOSSY)
SBE* SAND BEIGE	CHM* CHAMPAGNE (GLOSSY)
CPE* CLAY PINK	RAL** PLEASE SPECIFY RAL CODE
NBE* NAVY BLUE	
* ALL FINISHES ARE FINE TEXTURED WITH THE EXCEPTION OF CHM, SIM	
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
ACCESSORY ACCESSOIRE	
ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING	
39NLAA* NLIGHT AIR GEN 2 REMOTE CONTROLLER	
39NLWA* NLIGHT WIRED REMOTE CONTROLLER	



## SPECIFICATION

# TULIP ARRAY 4425-TUL

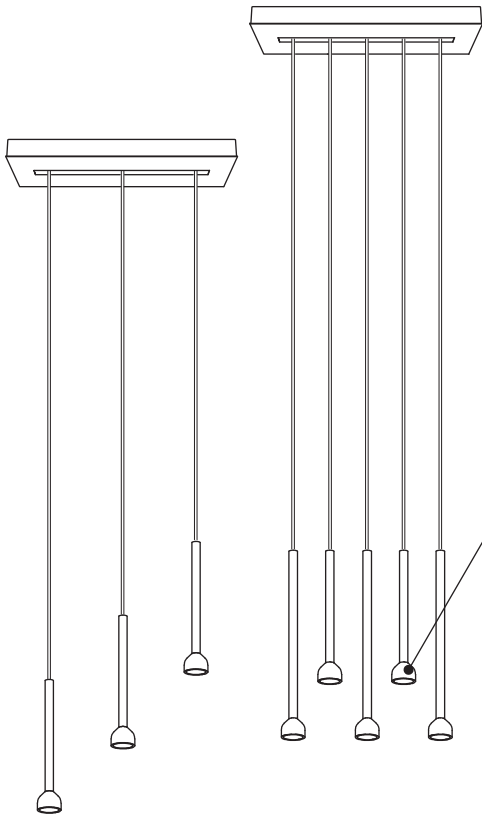

CONFIG. 312S

CONFIG. 618S

## OFFERED WITH 3 OR 5 DROPS

Choose amongst the large variety of predefined clusters offers or configure your own.


Specify the total height from the ceiling to the bottom of the fixture, ensuring it meets the configuration's minimum height, and we'll take care of the rest.

## TAILORED TUBE LENGTHS


Offered in 12 in and 18 in, Tulip allows refined compositions using single lengths or mixed-tube arrangements.

## PERSONALIZE THE LOOK


Choose from three organic diffuser shapes: Bulb, Bud, and Blossom, each inspired by a Tulip's evolving form.

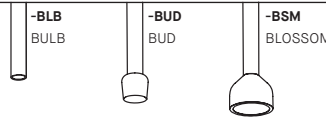

## OVERALL DIMENSION

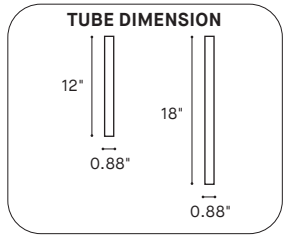

+

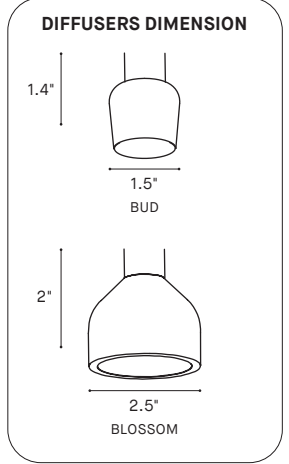

DISCOVER THE FULL TULIP COLLECTION AT [EUREKA.COM](http://EUREKA.COM)

DÉCOUVREZ LA COLLECTION TULIP COMPLÈTE SUR [EUREKA.COM](http://EUREKA.COM)

**PENDANT ALSO AVAILABLE WITH INDIVIDUAL CANOPY**

Integrated driver  
Ø 5" X 0.2"

- SEE PRODUCT **4191** -

## PRODUCT SPECIFICATION

**4425-TUL-3**  
(3 PENDANTS)


**4425-TUL-5**  
(5 PENDANTS)

PERFORMANCE	BULB — BUD — BLOSSOM	BULB — BUD — BLOSSOM
SYSTEM WATTAGE	10 W	18 W
DELIVERED LUMENS (4000K)	300 — 381 — 441 LM	500 — 635 — 735 LM
EFFICACY	30 — 38 — 44 LM/W	28 — 35 — 41 LM/W
OTHER INFORMATION		
WEIGHT	14 LBS / 6.4 KG	17 LBS / 7.7 KG
L70 (LUMEN MAINTENANCE)	60,000 HRS	60,000 HRS

## EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

## LIGHT DISTRIBUTION

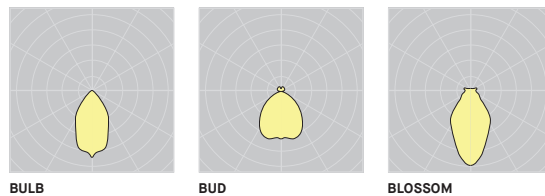

BULB

BUD

BLOSSOM



Visit our website for warranty terms and conditions.



## TECHNICAL DATA

# TULIP ARRAY 4425-TUL

## DIFFUSERS OPTIONS


### OVERALL HEIGHT

The minimum overall height has been calculated using the minimum distance of 12" between the canopy and the first tube. For cable distances longer than 180" please contact Eureka.

### HAUTEUR TOTALE

La hauteur totale minimale a été calculée en utilisant la distance minimale de 12" entre le pavillon et le premier tube. Pour les distances de câble supérieures à 180", veuillez contacter Eureka.

### DIFFUSERS OPTIONS:

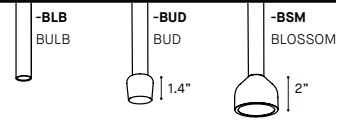

### CUSTOM CONFIGURATION

For custom or large-scale configurations, simply contact the factory and we will be pleased to discuss your design requirements.


### CONFIGURATION PERSONNALISÉE

Pour des configurations personnalisées ou à grande échelle, veuillez simplement contacter l'usine et nous serons heureux de discuter de vos exigences de conception.

## STANDARD CONFIGURATIONS CONFIGURATIONS STANDARDS


**312L**  
Overall Height  
Min. 74"/1879mm

Leveled Cluster  
3X 12" Pendants

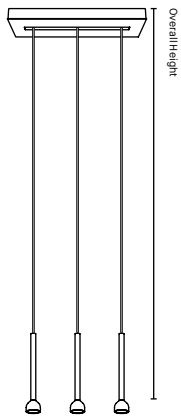


**318L**  
Overall Height  
Min. 74"/1879mm

Leveled Cluster  
3X 18" Pendants

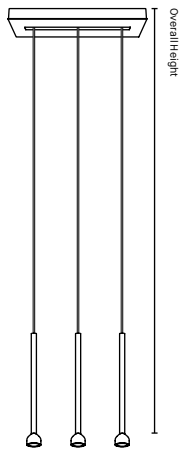


**31XL**  
Overall Height  
Min. 74"/1879mm

Leveled Cluster  
1X 18" + 2x 12" Pendants

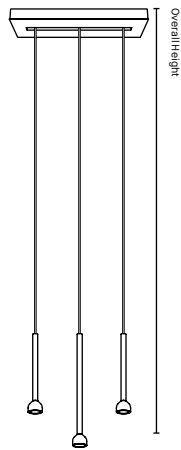


**312I**  
Overall Height  
Min. 74"/1879mm

Inclined Cluster  
3x 12" Pendants

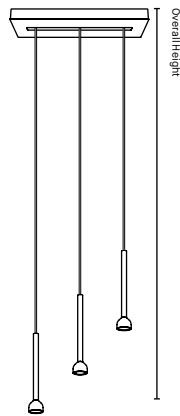


**318I**  
Overall Height  
Min. 74"/1879mm

Inclined Cluster  
3X 18" Pendants

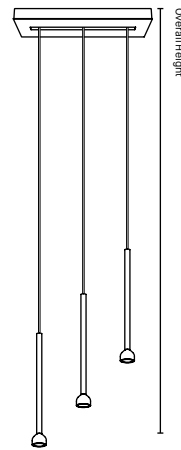


**312V**  
Overall Height  
Min. 74"/1879mm

V-Shaped Cluster  
3X 12" Pendants

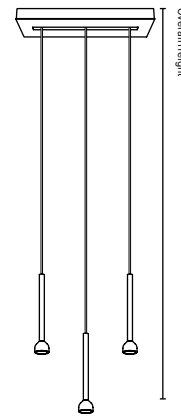


**318V**  
Overall Height  
Min. 74"/1879mm

V-Shaped Cluster  
3X 18" Pendants

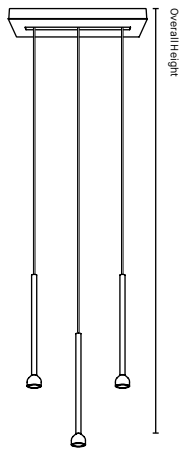


**512L**  
Overall Height  
Min. 74"/1879mm

Leveled Cluster  
5X 12" Pendants

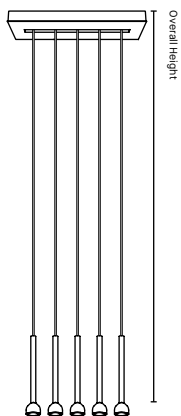


**518L**  
Overall Height  
Min. 74"/1879mm

Leveled Cluster  
5X 18" Pendants

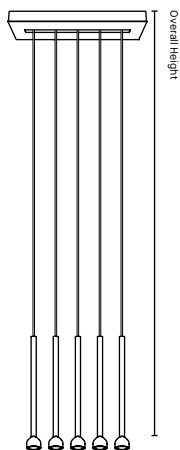


**51XL**  
Overall Height  
Min. 74"/1879mm

Leveled Cluster  
3X 18" + 2x 12" Pendants

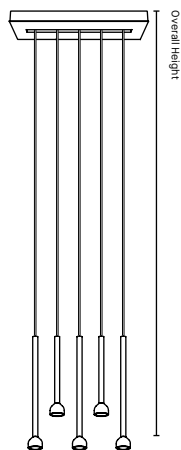


**512I**  
Overall Height  
Min. 74"/1879mm

Inclined Cluster  
5x 12" Pendants

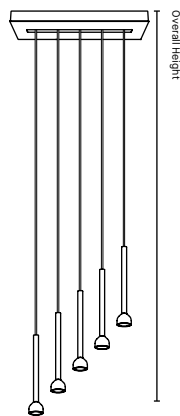


**518I**  
Overall Height  
Min. 74"/1879mm

Inclined Cluster  
5X 18" Pendants

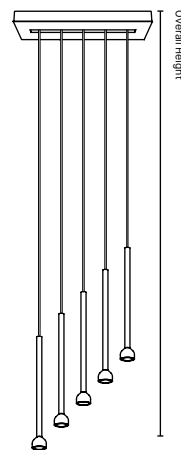

**512V**  
Overall Height  
Min. 74"/1879mm

V-Shaped Cluster  
5X 12" Pendants

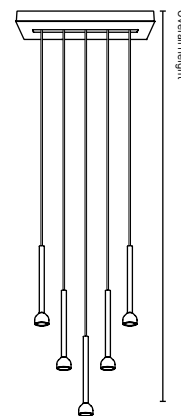

**518V**  
Overall Height  
Min. 74"/1879mm

V-Shaped Cluster  
5X 18" Pendants

