

DROP TULIP - 4427-TUL

PROJECT PROJÉT
SPEC TYPE
NOTES




DIFFUSER DIFFUSEURS




FINISH FINI



POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

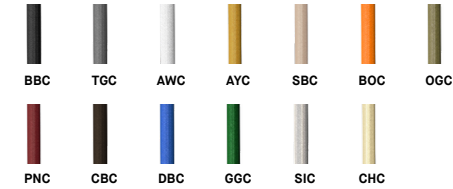

CONFIGURATION OPTIONS OPTION DE CONFIGURATIONS

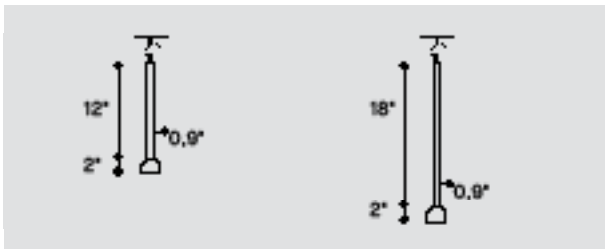

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

4427-TUL DROP TULIP

CONFIGURATION CONFIGURATION

312L	LEVELED CLUSTER (3 PENDANTS 12")
318L	LEVELED CLUSTER (3 PENDANTS 18")
312S	SPIRAL CLUSTER (3 PENDANTS 12")
318S	SPIRAL CLUSTER (3 PENDANTS 18")
312C	CASCADING CLUSTER (3 PENDANTS 12")
318C	CASCADING CLUSTER (3 PENDANTS 18")
31XC	CASCADING CLUSTER (VARIED LENGTHS, 1 PENDANT 18" + 2 PENDANTS 12")
612L	LEVELED CLUSTER (6 PENDANTS 12")
618L	LEVELED CLUSTER (6 PENDANTS 18")
612S	SPIRAL CLUSTER (6 PENDANTS 12")
618S	SPIRAL CLUSTER (6 PENDANTS 18")
612C	CASCADING CLUSTER (3 PENDANTS 12")
618C	CASCADING CLUSTER (3 PENDANTS 18")
61XC	CASCADING CLUSTER (VARIED LENGTHS, 3 PENDANTS 18" + 3 PENDANTS 12")

DIFFUSER DIFFUSEUR

BLB	BULB - RECESSED FLAT LENS (BEAM ANGLE 20°)
BUD	BUD - 1" SMALL DIFFUSER, FROSTED
BSM	BLOSSOM - 2" LARGE DIFFUSER, FROSTED

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT

LED

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

WDIM	2200K-3000K
27	2700K (STATIC WHITE)
30	3000K (STATIC WHITE)
35	3500K (STATIC WHITE)
40*	4000K (STATIC WHITE)

* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

90 90+ CRI

90

VOLTAGE VOLTAGE

120V	120 VOLT
277V	277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV	0-10V DIMMING (120V-277V)
DP	PHASE DIMMING (120V ONLY)
NLTAIR2*	NLIGHT AIR CONTROL GEN 2
NLIGHT*	NLIGHT WIRED CONTROL

*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLA A FOR NLTAIR2 OR 39NLWA FOR NLIGHT) REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

CABLE LENGTH LONGUEUR DE CÂBLE

** OVERALL HEIGHT (PLEASE SPECIFY)
** OVERALL HEIGHT (H) IS MEASURED FROM BOTTOM OF THE FIXTURE TO CEILING, IN INCHES CONFIGURATION PATTERN IS SET, ONLY UPPER CABLES ARE INFLUENCED BY OVERALL HEIGHT

CANOPY FINISH FINI PAVILLON

BLKE	BLACK
WHE	WHITE
MATCH*	COLOR MATCH WITH TUBE FINISH

* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

BBC	BASIC BLACK	PNC	PINOT NOIR
BOC	BLOOD ORANGE	SIC	SILVER
DBC	DYNAMIC BLUE	AYC	APRICOT YELLOW
TGC	TITANIUM GRAY	CBC	CHOCOLATE BROWN
OGC	OLIVE GREEN	CHC	CHAMPAGNE
GGC	GRASS GREEN	SBC	SAND BEIGE
AWC	ARCTIC WHITE		

TUBE FINISH FINI TUBE

BLKE	BLACK	HGE*	HUNTER GREEN
WHE	WHITE	CBE*	CHOCOLATE BROWN
DBE*	DYNAMIC BLUE	STE*	SUMMER TEAL
GGE*	GRASS GREEN	SGE*	SAGE GREY
BRE*	BRICK RED	LNE*	LUNAR GREY
AYE*	APRICOT YELLOW	SIM*	SILVER (GLOSSY)
SBE*	SAND BEIGE	CHM*	CHAMPAGNE (GLOSSY)
CPE*	CLAY PINK	RAL**	PLEASE SPECIFY RAL CODE
NBE*	NAVY BLUE		

* ALL FINISHES ARE FINE TEXTURED WITH THE EXCEPTION OF CHM, SIM

* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

ACCESSORY ACCESSOIRE


ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING

39NLAA*	NLIGHT AIR GEN 2 REMOTE CONTROLLER
39NLWA*	NLIGHT WIRED REMOTE CONTROLLER




SPECIFICATION

TULIP DROP 4427-TUL

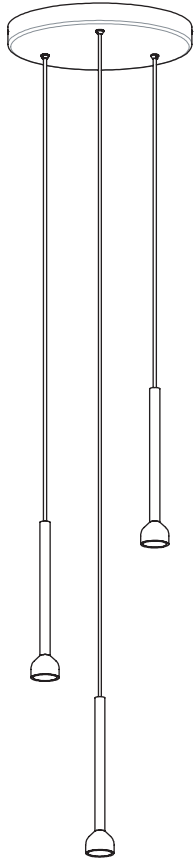

CONFIG. 312S

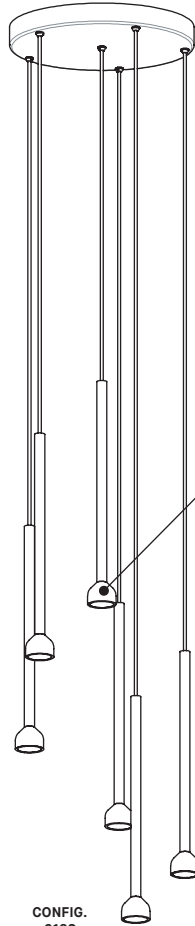

CONFIG. 618S

OFFERED WITH 3 OR 6 DROPS

Choose amongst the large variety of predefined clusters offers or configure your own.


Specify the total height from the ceiling to the bottom of the fixture, ensuring it meets the configuration's minimum height, and we'll take care of the rest.

TAILORED TUBE LENGTHS


Offered in 12 in and 18 in, Tulip allows refined compositions using single lengths or mixed-tube arrangements.

PERSONALIZE THE LOOK


Choose from three organic diffuser shapes: Bulb, Bud, and Blossom, each inspired by a Tulip's evolving form.



OVERALL DIMENSION



+

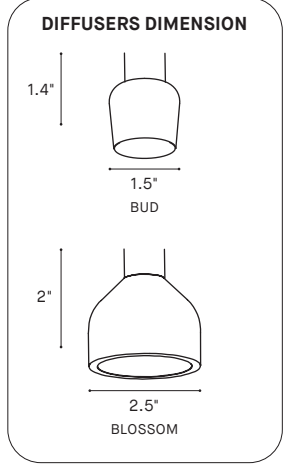

DISCOVER THE FULL TULIP COLLECTION AT EUREKA.COM

DÉCOUVREZ LA COLLECTION TULIP COMPLÈTE SUR EUREKA.COM

PENDANT ALSO AVAILABLE WITH INDIVIDUAL CANOPY

Integrated driver
Ø 5" X 0.2"

- SEE PRODUCT **4191** -

PRODUCT SPECIFICATION

4427-TUL-3
(3 PENDANTS)


4427-TUL-6
(6 PENDANTS)

PERFORMANCE	BULB — BUD — BLOSSOM	BULB — BUD — BLOSSOM
SYSTEM WATTAGE	10 W	20 W
DELIVERED LUMENS (4000K)	300 — 381 — 441 LM	600 — 762 — 882 LM
EFFICACY	30 — 38 — 44 LM/W	30 — 38 — 44 LM/W
OTHER INFORMATION		
WEIGHT	2 LBS / 1 KG	12 LBS / 5.5 KG
L70 (LUMEN MAINTENANCE)	60,000 HRS	60,000 HRS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

LIGHT DISTRIBUTION

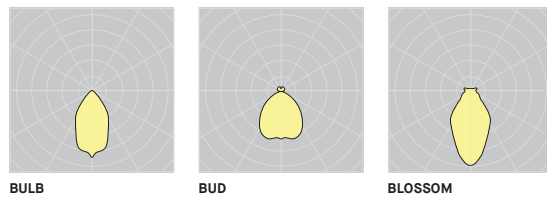

BULB

BUD

BLOSSOM



Visit our website for warranty terms and conditions.



TECHNICAL DATA

TULIP DROP 4427-TUL


OVERALL HEIGHT

The minimum overall height has been calculated using the minimum distance of 12" between the canopy and the first tube. For cable distances longer than 180" please contact Eureka.

HAUTEUR TOTALE

La hauteur totale minimale a été calculée en utilisant la distance minimale de 12" entre le pavillon et le premier tube. Pour les distances de câble supérieures à 180", veuillez contacter Eureka.

DIFFUSERS OPTIONS:

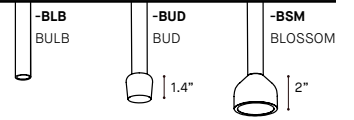

CUSTOM CONFIGURATION

For custom or large-scale configurations, simply contact the factory and we will be pleased to discuss your design requirements.

CONFIGURATION PERSONNALISÉE

Pour des configurations personnalisées ou à grande échelle, veuillez simplement contacter l'usine et nous serons heureux de discuter de vos exigences de conception.

STANDARD CONFIGURATIONS CONFIGURATIONS STANDARDS

<p>312L Overall Height Min. 24"/610mm</p> <p>Leveled Cluster 3X 12" Pendants</p>	<p>318L Overall Height Min. 30"/762mm</p> <p>Leveled Cluster 3X 18" Pendants</p>	<p>312S Overall Height Min. 48"/1219mm</p> <p>Spiral Cluster 3X 12" Pendants</p>	<p>318S Overall Height Min. 60"/1524mm</p> <p>Spiral Cluster 3X 18" Pendants</p>	<p>312C Overall Height Min. 42"/1067mm</p> <p>Cascading Cluster 3X 12" Pendants</p>	<p>318C Overall Height Min. 48"/1219mm</p> <p>Cascading Cluster 3X 18" Pendants</p>	<p>31XC Overall Height Min. 48"/1219mm</p> <p>Cascading Cluster 1X 18" + 2X 12" Pendants</p>
<p>612L Overall Height Min. 24"/610mm</p> <p>Leveled Cluster 6X 12" Pendants</p>	<p>618L Overall Height Min. 30"/762mm</p> <p>Leveled Cluster 6X 18" Pendants</p>	<p>612S Overall Height Min. 54"/1372mm</p> <p>Spiral Cluster 6X 12" Pendants</p>	<p>618S Overall Height Min. 60"/1524mm</p> <p>Spiral Cluster 6X 18" Pendants</p>	<p>612C Overall Height Min. 48"/1219mm</p> <p>Cascading Cluster 6X 12" Pendants</p>	<p>618C Overall Height Min. 54"/1372mm</p> <p>Cascading Cluster 6X 18" Pendants</p>	<p>61XC Overall Height Min. 54"/1372mm</p> <p>Cascading Cluster 3X 18" + 3X 12" Pendants</p>